


Aluminum Photoluminescent Stair Nosings

Hyper
Q-STEP
Ultimate
★★★★★

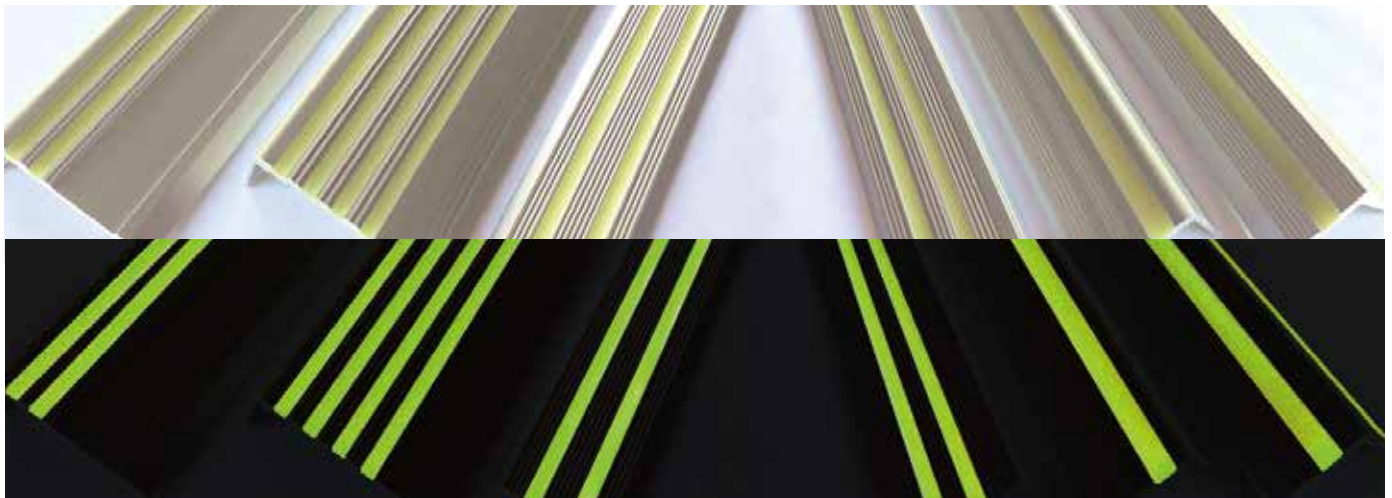

Benefits

- Amazingly bright!
- Extremely durable
- For indoor and outdoor applications
- Strong protective layer in Photoluminescent areas
- Easy installation with construction adhesive, screw or glues

Aluminum Photoluminescent Stair Nosings

<p>Code: HAS3603 Weight: 250 g/m</p>	<p>Code: HAS5922 Weight: 510 g/m</p>	<p>Code: HAS5320 Weight: 380 g/m</p>
<p>Code: HAS3413 Weight: 286 g/m</p>	<p>Code: HAS3520 Weight: 332 g/m</p>	<p>Code: HAS3030 Weight: 413 g/m</p>

Material: Aluminum extruded shapes; Photoluminescent portion: Photoluminescent material + polyester resin
Length: 1400mm/PC maximum Installation: Construction adhesive, screw or glues. MOQ: 50M

Luminance Data

Elapsed time	2 minutes	10 minutes	30 minutes	60 minutes
Luminance (mcd/m ²)	5179	1071	280	105
Specification of DIN 67510 Class E	2200	520	170	70

Installation Example

[Under daylight]



[In the dark]

